




J·DRAIN[®]

Engineered Drainage Systems

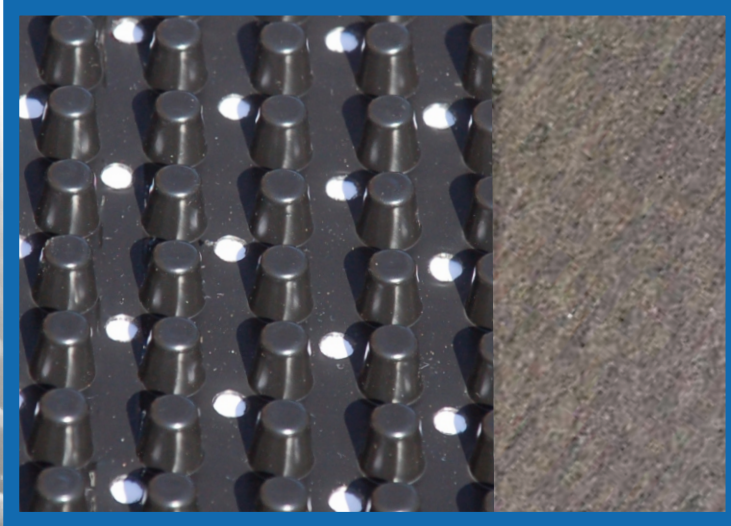

DUAL SIDED DRAINAGE

APPLICATIONS

TRENCH DRAINS
 INTERCEPTOR DRAINS
 LANDFILL ENCLOSURES
 SLOPED EMBANKMENTS

J-DRAIN[®] ES 2102 Series

Meets AASHTO M 288 Requirements

J-DRAIN ES 2102

For over 30 years, J-DRAIN drainage composites have been successfully installed to relieve hydrostatic pressure in building construction, civil engineering, environmental and landscape applications. Eliminating the costly and time-consuming installation of drainage aggregate, J-DRAIN drainage composites provide a more efficient, cost effective way to provide sub-surface drainage. The ES 2102 series of prefabricated drainage composites are engineered to provide superior performance to meet specific project conditions. The multi-directional flow design allows for a continuous path for water discharge. ES 2102 is lightweight, easy to install and has drainage flow capacities that are 3-5 times that of traditional aggregate systems.

The ES 2102's three dimensional dimpled core is formed from a chemical resistant polypropylene polymer. By extruding each dimple to exact performance standards, the high compressive strength of the core withstands installation and in-situ earth stresses. The core is punched to allow double sided drainage, then bonded to a layer of geotextile filter fabric on each side of the core. The integrated core and fabric system optimizes drainage channel consistency, minimizing soil particle intrusion for maximum flow capacity, allowing water to freely enter the drainage channel. The ES 2102 series is engineered for high flow requirements with heavy soil pressure conditions in vertical and horizontal applications, available with nonwoven filter fabrics meeting AASHTO M288-06 specifications for survivability.

info@j-drain.com

www.j-drain.com

JDR Enterprises, Inc.

292 S. Main St., Suite 200 Alpharetta, GA 30009
 (800) 843-7569 (770) 442-1461 Fax: (770) 664-7951



J·DRAIN[®]

ES 2102 Series

Physical Properties

Property	Test Method	UOM	ES 2132	ES 2142	ES 2162	ES 2182
FABRIC						
Material			Non woven PP	Non woven PP	Non woven PP	Non woven PP
AASHTO M288	Survivability		-	<i>Class 3</i>	<i>Class 2</i>	<i>Class 1</i>
Grab Tensile Strength	ASTMD 4632	lbs	100	120	160	205
		N	445	534	712	912
Apparent Opening Size	ASTMD 4751	U.S. Sieve	70	70	70	80
		mm	0.212	0.212	0.212	0.18
Flow Rate	ASTMD 4491	gal/min/ft ²	140	135	110	95
		l/min/m ²	5704	5500	4481	3870
CBR Puncture Strength	ASTMD 6241	lbs	250	310	410	500
		N	1113	1380	1825	2224
Permittivity	ASTMD 4491	sec ⁻¹	2.0	1.7	1.5	1.4
Grab Tensile Elongation	ASTMD 4632	%	50	50	50	50
UV Resistance	ASTMD 4355	% (@ 500 hrs)	70	70	80	70
CORE						
Thickness	ASTMD 1777	inch	0.4	0.4	0.4	0.4
		mm	10.16	10.16	10.16	10.16
Compression	ASTMD 1621	psf	21,000	21,000	21,000	21,000
		kNm ²	1005	1005	1005	1005
Flow Rate Hydraulic Gradient = 1 @3,600 psf	ASTMD 4716	gal/min/ft	23	23	23	23
		l/min/m	286	286	286	286
ES 2102 Series has 2 layers of Filter Fabric bonded to both front and back side of punched core. Roll Size: 4 foot width x 50 foot length. Specialty roll widths and fabrics require additional lead time and minimum quantity orders.						

The information contained herein is believed by JDR Enterprises, Inc. to be accurate and is offered solely for the customer's consideration, investigation and verification. Determination of suitability for use is the responsibility of the user. JDR's Limitations, Limited Warranty, & Disclaimer along with Standard Terms & Conditions apply. See www.j-drain.com for more info. **Limitations:** J-DRain is resistant to chemicals in normal soil environments. However, some reagents may affect the performance of J-DRain. A JDR representative should be contacted for further information to determine the suitability of use of J-DRain in unusual soil environments. J-DRain should be limited to its exposure to ultra-violet sunlight. J-DRain should be backfilled or covered within seven days of installation. **Disclaimer:** All information, drawings and specifications are based on the latest published information at the time of printing. JDR reserves the right to make changes due to manufacturing improvements and engineering at any time. All physical properties are minimum average roll values (MARV). Standard variations of 10% in mechanical properties and 15% in hydraulic properties are normal.

info@j-drain.com

www.j-drain.com

JDR Enterprises, Inc.

292 S. Main St., Suite 200 Alpharetta, GA 30009
(800) 843-7569 (770) 442-1461 Fax: (770) 664-7951